

# EnSight MWD™ ELECTRO-MAGNETIC NON-RETRIEVABLE DIPOLE SYSTEM

## The EnSight MWD Electro-Magnetic Non-Retrievable Dipole System measures and transmits downhole data to the surface, enabling the directional drilling of a borehole.

Data transmitted typically includes the inclination and azimuth angles of the borehole, the drilling system toolface (roll angle), and the tool temperature. The system can also be configured to transmit accelerometer and magnetometer sensor values, which can then be used to calculate the borehole angles.

The figure shows the downhole parts of the electric dipole system. At the top of the system, a non-magnetic drill collar with an electrically insulated gap sub is used. To generate electromagnetic signals that propagate to the surface, a low frequency phase modulated signal is applied across the insulating gap. An upper electrode and the bolt in dipole head are used to apply the signal across the gap.

The gap sub signal is generated by the power driver electronics unit mounted in a pressure barrel just below the dipole head. Typically, two 29 V, 29 Amp-hour batteries encased in pressure barrels are used to power the electric dipole system, although use of three or more batteries is possible for situations where high power output for a long period is required.

The borehole angular orientation and drill string toolface are measured by a directional sensor mounted in a pressure barrel below the batteries. A gamma sensor is mounted directly below the system directional sensor.


The Electric Dipole System is approximately 222 inches long and utilizes 1-7/8" diameter pressure barrels for system electronics and batteries. The same basic system can be used with 4-3/4", 6-1/2", 8" and 9" drill collar sizes. Mounting spacers enable the use of drill collar sizes greater than 4-3/4". To stabilize the tool string in the drill collars, rubber finned centralizers are used to connect the various system pressure barrels.

### FEATURES:

- Proven design with high reliability, MTBF over 2500 hours
- Data transmission from depths of 14,000+ feet (4200+ meters) in favorable conditions
- Real-time Annular Pressure, Drill Collar Internal Pressure, Rotation Sensing, and Gamma

### APPLICATIONS:

- Low cost, reliable replacement to mud pulse systems
- Underbalanced drilling
- High-speed drilling where fast data rates are required
- Low-pressure formations or lost circulation situations

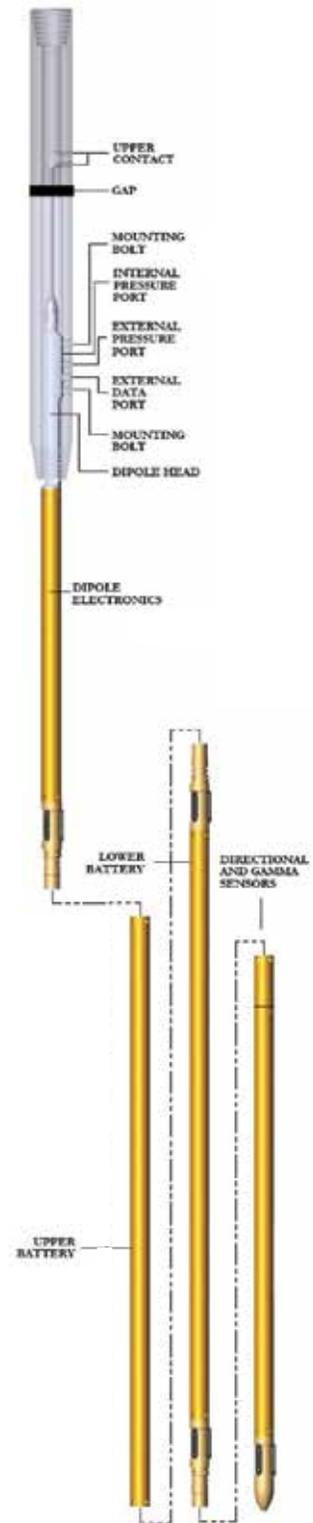

## DOWNHOLE SYSTEM SPECIFICATIONS

Frequencies	2 - 10 Hz, user selectable
Baud rate	One half of the transmission frequency. (For example, a transmission frequency of 9 Hz has a 4½ baud rate.)
Power	Batteries typically consist of two Double D stacks of 8 moderate rate cells each, producing 29V at 29 ampere-hour capacity. Battery lifetime: <ul style="list-style-type: none"> <li>- At 10 Watts power level, battery life is 80 hrs.</li> <li>- At 20 Watts power level, battery life is 40 hrs.</li> <li>- At 40 Watts (max. power), battery life is 20 hrs.</li> </ul>
Gap Sub Sizes	4¾" OD X 67.375 L; 3½ IF pin at bottom, box at top 6½" OD X 72.0" L
Tool string approximate length (2 batteries)	222"
Sensors	Directional Sensor : Model 760 Gamma Sensor: Model 751 or Model 761
Vibration Damage Threshold (based on averaged vibration data from the Model 751 gamma sensor as reported in the AP250 Dipole Log)	Below 8 G: damage unlikely 8 - 12 G: damage possible 12 G and above: damage likely
Dipole Head Annular and Bore Pressure Sensors	0 to 5000 PSI Tolerance +- 2% Units: PSI, bar, kPa (user selectable in Detect)

## UPHOLE SYSTEM SPECIFICATIONS: MODEL 560 PREAMPLIFIER/FILTER SYSTEM

Preamp gain selectable	0 to 42
Amplifier gain selectable	0 to 96
Power	115V @ 1A 220V @ 0.5A
Size	19"W x 13"D x 3 ½"H (rack mountable)

## UPHOLE SYSTEM SPECIFICATIONS: MODEL 574 DOWNLINK SYSTEM

Main power	115V @ 10A 220V @ 2.5A
Size	16"W x 12"D x 7½"H

